

## 5 - Pole Connector

## P2 - D5 Series

- Comply With IEC / EN60998-2-2
- Easy Mounting ("Fixing - Snaps" is Optional)
- Prints on Buttons: 3 / N / E / 1 / 2 or Customer Request
- Ready for use With Our Cable Clamps for Strain Relief


### Specification

Housing:	Polyamide 66
Metal Part:	Plated Brass / Steel Spring
Voltage (V):	IEC / EN 450: UL 300V
Ampere (A):	10 ( For Operation )

### Wiring Capacity (mm<sup>2</sup>)

	Wiring Holes ( a + b )	Wiring Holes ( c )
	Solid / Flexible	Solid Only
Installation / User Side	0.5 - 2.5	0.5 - 0.75
	Solid / Flexible	Solid Only
Factory Wiring Side	0.5 - 2.5	0.5 - 0.75

Strip Length of Cable: 8-10mm




### Packing Details

500pcs per exp ctn

- Pls refer to Spec of P2-SR1 / SR2 for details of Cable-Clamp

### Product Code

P2-D5

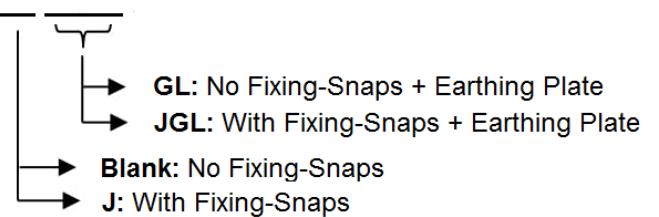

Pls refer to Spec of P2-SR1 / SR2 for details about Cable-Clamp

### TS Connect AB / Power Outlet

Fagerstagatan 9, 163 53 Spånga, Sweden  
Tel: +46 8 795 93 10 Mail: [sales@power-outlet.com](mailto:sales@power-outlet.com)  
Website: [www.power-outlet.com](http://www.power-outlet.com) [www.tsconnect.se](http://www.tsconnect.se)